

# Rapiscan 638XR

**Rapiscan**<sup>®</sup>  
systems

An OSI Systems Company

## BAGGAGE AND PARCEL INSPECTION

**Advanced Cargo Screening**

**Large Pallet Cargo**

**200kV Generator**

**Cost Effective**



The **Rapiscan 638XR** is an advanced X-ray screening system for ULD type, ISO standard, lower deck and large cargo pallet type freights. It comes with a 1,800 mm (70.9 inches) wide by 1,800 mm (70.9 inches) high tunnel opening and uses innovative screening technology to generate an outstanding high resolution view of the object under inspection.

Like all systems in the 600 series family of X-ray scanning solutions, the Rapiscan 638XR is built on a standardized platform that makes it easy to install and maintain, and comes with features such as a dual-energy detection, a streamlined, ergonomic design, and Rapiscan's feature-rich OS600 system software.

### CUSTOMER SUPPORT SERVICES

Our team is dedicated to providing a prompt, effective and personalized response that exceeds your expectations. With spare parts inventory and skilled technicians all over the world, you can be certain Rapiscan Systems will always be prepared with a solution to address your requirements. By measuring response time, parts delivery and support status, our team embraces a customer focused philosophy to ensure continual improvement in customer support, products and services.

### Feature & Option Highlights

**OS600 System Software:** Rapiscan's OS600 software provides an intuitive Graphical User Interface with improved image quality as well as advanced networking capabilities.

**Threat Image Projection (TIP):** TIP inserts digital threat images at configurable frequencies into the regular flow of parcels. TIP is the preferred operator performance measurement and training method used by regulatory agencies worldwide.

**Threat Image Projection Network (TIPNET):** TIPNET is a secure, high speed network that links all TIP enabled systems to a central station.

**Target:** Target™ is Rapiscan's innovative automatic threat and contraband detection technology. Target's software algorithms search X-ray images for targeted materials by analyzing the mass, size and atomic number of items in the image.

**Operator Training Program (OTP):** OTP is an easy-to-use software application that helps users learn key system features and functionality.

**Density Threshold Alert (DTA):** DTA generates a visible alarm when an imaged object exceeds a user-specified density threshold.



## BAGGAGE AND PARCEL INSPECTION

### PHYSICAL SPECIFICATIONS

Dimensions:	Length: 9,440 mm (373 in)
	Height: 2,384 mm (94 in)
	Width: 3,115 mm (123 in)
Tunnel Size:	1,800 mm (71 in) X 1,800 mm (71 in)
Max. Object Size:	1,710 mm (67 in) X 1,790 mm (70 in)
Conveyor Speed:	0.20 m/sec (39.4 ft./min)
Conveyor Max Load:	3,000 Kg (6,614 lbs) evenly distributed at 220 V
	1,500 Kg (3,307 lbs) evenly distributed at 110 V
Conveyor Height:	285 mm (11 in)
Approx Weight:	Net: 4,243 Kg (9,335 lbs)
System Power:	115/230 VAC +/- 10% / 60/50Hz

### X-RAY GENERATOR AND IMAGE PERFORMANCE


Steel Penetration:	45 mm guaranteed, 50 mm typical
Wire Resolution:	38 AWG guaranteed, 40 AWG typical
Material Separation:	Low Z, Medium Z, High Z to 0.5 Z accuracy
Cooling:	Sealed oil bath with forced air
Anode Voltage:	Operating at 200kV
Tube Current:	1.0 mA
Orientation:	Horizontal

### OPERATING ENVIRONMENT

Storage Temperature:	-20°C to 50°C
Operating Temperature:	0°C to 40°C
Relative Humidity:	5 to 95% non-condensing

### HEALTH & SAFETY

All Rapiscan Systems products comply with applicable international health and safety regulations including USA FDA X-ray systems (Federal Standard 21CFR 1020.40) and Health and Safety at Work Act 1974-section 6, Amended by the Consumer Protection Act 1987. Maximum leakage radiation less than 0.1mR/hr (1µ Sv/hr) in contact with outer panels. (FDA Compliance applies to systems configured with an operator presence device.)

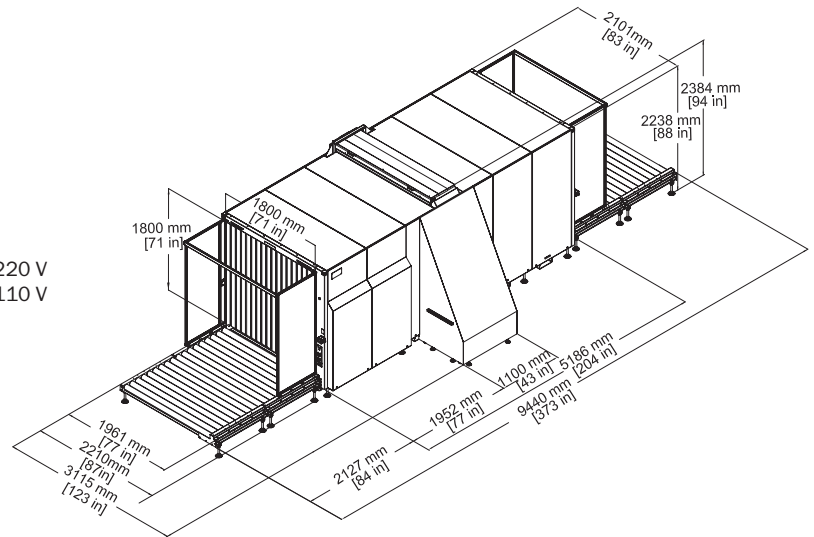

STANDARD FEATURES	OPTIONS AND ACCESSORIES
Multi Energy Imaging (4 Color)	Threat Image Projection (TIP)
Crystal Clear	Target
Black and White Viewing	Interactive Target
Organic / Inorganic Stripping	Density Threshold Alert (DTA)
Inverse Video	Operator Training Program (OTP)
High Penetration	Manual Scan
Variable Edge Enhancement	Automatic Image Archiving
Variable Color Stripping	Threat Image Projection Network (TIPNET)
Variable Gamma	Network Display Station (NDS)
Variable Density Zoom	Smart Card Login
Zoom (to 64x)	Power Conditioner
View Previous Bag	Foot-mat
Manual Image Archive	Rollerbed Accessories
Configurable Image Processing Keys	
Baggage Counter	
Date / Time Display	
Search Indicator	
UPS (Uninterrupted Power Supply)	
Remote Workstation	
Flat Panel LCD Monitor	

## SAFETY Act Certified



## ISO 9001:2000 Certified

With continual development of our products Rapiscan Systems reserves the right to amend specifications without notice.

[www.rapiscansystems.com](http://www.rapiscansystems.com) • [sales@rapiscansystems.com](mailto:sales@rapiscansystems.com)

### AMERICAS, CARIBBEAN

2805 Columbia Street  
Torrance, California 90503  
UNITED STATES OF AMERICA  
Tel: +1 310-978-1457  
Fax: +1 310-349-2491

### EUROPE, MIDDLE EAST, AFRICA

X-Ray House  
Bonehurst Road  
Saifords  
Surrey RH1 5GG  
UNITED KINGDOM  
Tel: +44 (0) 870-7774301  
Fax: +44 (0) 870-7774302

### ASIA

240 Macpherson Road  
#07-03 Pines Industrial Building  
Singapore 348574  
SINGAPORE  
Tel: +65-6743-9913  
Fax: +65-6743-9915

### AUSTRALIA

Rapiscan House  
4 Ross Street  
South Melbourne Victoria  
Australia 3205  
AUSTRALIA  
Tel: +61 3 9929 4600  
Fax: +61 3 9929 4655

distributor stamp