



# Source-IT-Security



## X-Ray Model S3 150165

- ❖ Ergonomic Design
- ❖ Multi – Language Function Keys
- ❖ High – Performance Engineering
- ❖ Economic Solution
- ❖ 6 color Imaging technology

Source-IT-Security introduces a new X-ray screening manufacturer for the security market with the knowledge gained from over 60 years of combined experience from our management team working with our world-wide customer base. Our systems are designed for screening at checkpoints in airports, courthouses, office buildings, passenger cruise lines, and government facilities. Continuing with our commitment of minimized down time, our proprietary x-ray scanning operating system runs on a stable Linux platform insuring greater system stability and uptime.. The system has **6 Color** dual-energy images, lockable control panel, and self-diagnostics.

The Systems meets all international safety regulations including CE requirements , USFDA certifications, and ISO 9001:2008 Having been a services company for many years, we understand the importance of simplicity of design and ease of maintenance. Both these philosophies were incorporated in the R&D of all offered models in order to minimize down time with ease of maintenance in mind. The benefits of both philosophies is increased ROI for each end user of our offered x-ray systems. We have a very aggressive delivery schedule of 30 days from approved order date for most standard systems.



Source IT Security  
Liberty Lake – Washington 99019 USA

[www.source-it-security.com](http://www.source-it-security.com)

## Physical Properties

Dimensions:	Length	3,350 mm (132.0 in)
	Height	2,135 mm (84.0 in)
	Width	2,885 mm (113.5 in)
Tunnel Dimensions:	1,535 mm <b>W</b> x 1,655 mm <b>H</b>	
Conveyor Speed :	0.20 m/Sec	
Conveyor Load Capacity :	3,000 Kg (6,612 lbs) Evenly Distributed	
Conveyor Height :		
Approx . Weight Un packed	2,000 Kg ( 4,480 lbs)	
System Power :	230 VAC +/- 10% 50/60 Hz	

## X-Ray Generator & Image Performance

Steel Penetration :	30 mm Guaranteed ; 33 mm Typical	
Wire Resolution :	36 AWG Guaranteed ; 38 AWG Typical	
Generator Cool :	Oil and Forced air Cooling	
Anode Voltage :	170 KV , Operating at 160 KV	
Tube Current :	1.0 mA	
Direction Of X-Ray :	Vertically Upward	

## High-Penetration X-Ray Generator Options


## Computer Specifications

Processor :	Intel® Core™ i3 ( Or Superior)
Monitor :	22 " LED Color , Flicker free
Video Card	1GB Minimum
Hard Drive :	500 GB Minimum
USB Port :	6 Port Minimum
Operating System :	Linux

## Operating Environment

Storage Temperature :	-20°C to 60°C
Operating Temperature	-10 °C to 50 °C
Relative Humidity	5-95% non-condensing

## Health and Safety

All products meet all applicable international Health and safety regulations. Maximum level of radiation the exterior panels come in contact With is 0.1mR/hour.

Compliant with USFDA, Center of Devices and Radiation Health Standards for cabinet X-Ray systems (21-CFR 1020.40).


Film safety :	ISO 1600 / 33 DIN
CE Compliance :	Certified
FCC & IEC Compatibility:	Available

## Standard Features

Multi energy imaging  
**( 6 colors selectable )**  
 Detail enhancement (PV)  
 Edge Enhancement (EE)  
 Black & White view (B/W)  
 Organic/inorganic separation (OM/IM)  
 Pseudo color (PS)  
 Inverse view (IN)  
 High penetration (HP)  
 Variable edge clarification (+E -E)  
 Variable color separation (+C -C)  
 Variable contrast level (+G -G)  
 Variable density zoom (+D -D)  
 Zoom real time (64 xs)  
 Image of previous bag  
 Manual image archiving  
 Automatic image archiving  
 Programmable function keys  
 Baggage counter  
 Date/Time indicator  
 UPS (for computer)  
 Flat Panel LED Monitor  
 Threat Image Projection (TIP)  
 Organic danger alarm  
 Inorganic danger alarm  
 Operator Training Program (OTP)

## OPTIONAL FEATURES

UPS (Uninterrupted Power Supply)  
 Operator console  
 Input – output rollers  
 Barcode Reader System  
 Test Kit (STP/ASTM)  
 Remote Access Connection (Server)  
 External Camera Archiving

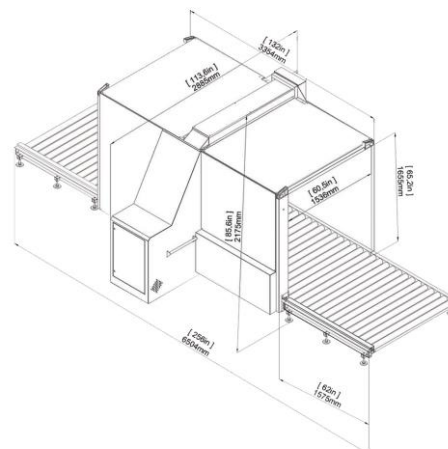

Source IT Security  
 Liberty Lake – Washington 99019 USA

[www.source-it-security.com](http://www.source-it-security.com)